




OUTSIDE DIAMETER:	17.50 inches	17.50 inches
MAX. TORQUE AT ZERO RPM:	16,600 in-oz	86.5 ft-lb
MAX. TORQUE AT MAX RPM:	72,800** in-oz	379** ft-lb
MAX. RPM:	2,500 rev/min	2,500 rev/min
MIN. TORQUE AT MAX RPM*:	3,230 in-oz	16.83 ft-lb
MAX. POWER @ MAX. RPM FOR 15 SEC.:	69.30 hp	69.30 hp
MAX. CONTINUOUS POWER @ MAX. RPM:	16.20 hp	16.20 hp

****torque value at 1,400 rpm**



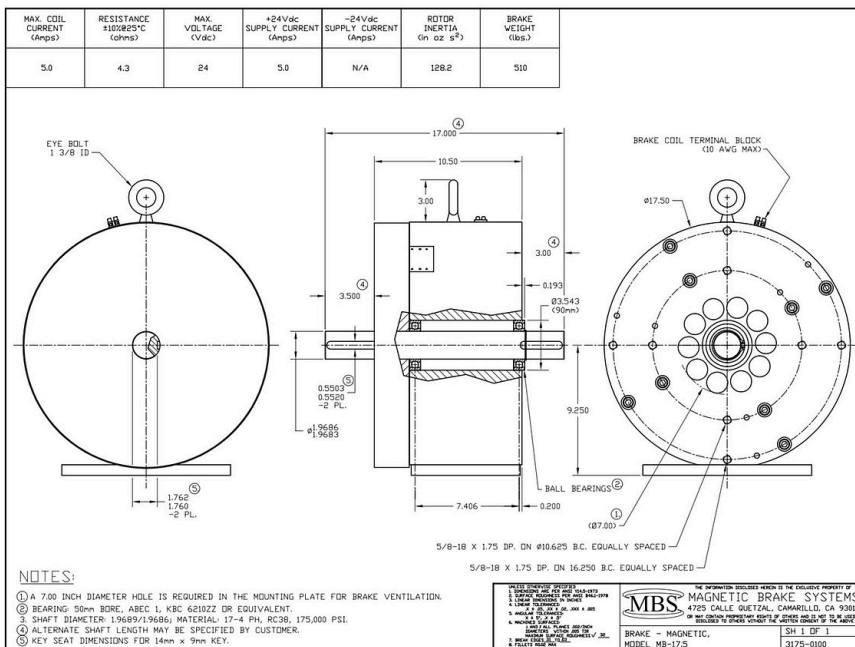


MB-17.5

SPECIFICATIONS - SI

OUTSIDE DIAMETER:	444.50 mm
MAX. TORQUE AT ZERO RPM:	117.30 N-m
MAX. TORQUE AT MAX RPM:	513.90** N-m
MAX. RPM:	261.80 rad/sec
MIN. TORQUE AT MAX RPM*:	22.80 N-m
MAX. POWER @ MAX. RPM FOR 15 SEC.:	51,698 watts
MAX. CONTINUOUS POWER @ MAX. RPM:	12,085 watts

*This torque is due to air drag and bearing friction; current and cogging at zero level.

**torque value at 1,400 rpm

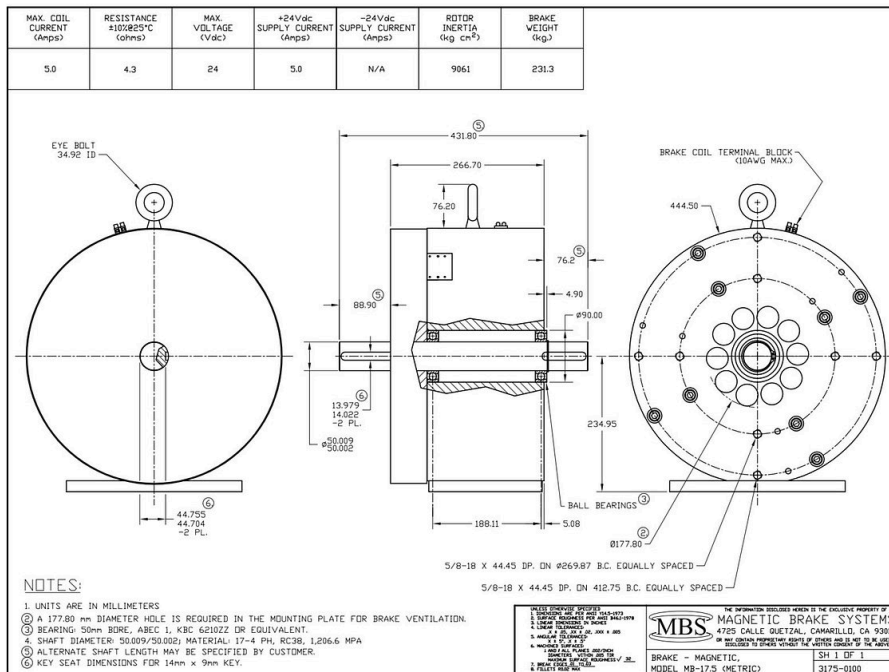

PERFORMANCE CURVES

