


MAX. COIL CURRENT (Amps)	RESISTANCE $\pm 10\%$ @25°C (ohms)	MAX. VOLTAGE (VDC)	+24VDC SUPPLY CURRENT (Amps)	-24VDC SUPPLY CURRENT (Amps)	ROTOR INERTIA (in oz s ²)	BRAKE WEIGHT (lbs)
3.0	4.5	24	0.5	3.0	0.004	1.8

#4-40 X .25 DP. DN 2.588 DIA B.C. EQUALLY SPACED - 3 PLACES

WIRE CONNECTIONS ON TOP

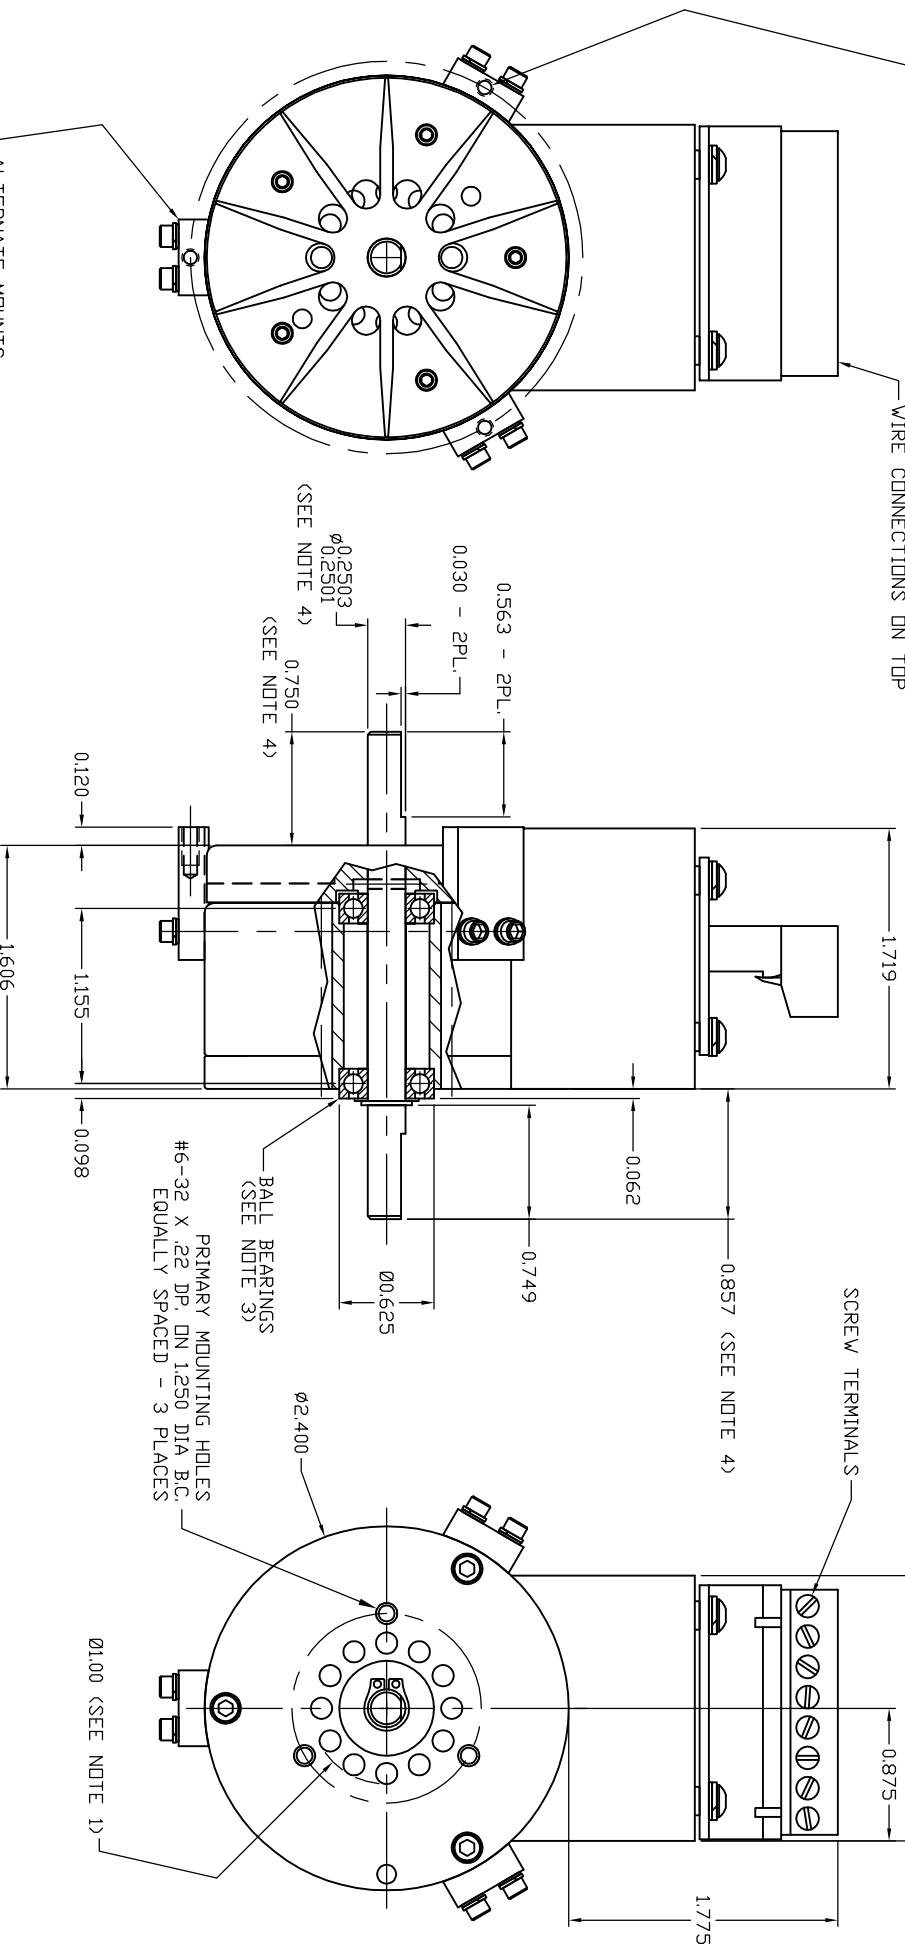

NOTES:

1. A 1.00 DIAMETER HOLE IS REQUIRED FOR VENTILATION PURPOSES.
2. IF THE BRAKE IS MOUNTED ON A FLAT SURFACE, IT SHOULD BE SPACED 0.25 INCHES FROM THE SURFACE.
3. PART #324-1070 IS AN OPTIONAL ITEM (3 PCS. REQ.) AND MUST BE ORDERED SEPARATELY.
4. DIMENSIONS SHOWN ARE FOR THE STOCK SHAFT WITH ONE FLAT ON EACH END. CUSTOMER MAY REQUEST SHAFT WITH KEYWAYS. SHAFT MATERIAL: 17-4 STAINLESS, RC38, 175,000 PSI.

UNLESS OTHERWISE SPECIFIED:
 1. DIMENSIONS ARE PER ANSI Y14.5-1973
 2. SURFACE FINISH PER ANSI B46.1-1978
 3. LINEAR DIMENSIONS IN INCHES
 4. LINEAR TOLERANCES: .02, .01, .005
 5. ANGLES: 5°, 10°, 15°, 30°
 6. MACHINED SURFACES: .002"/INCH
 7. DIMENSIONS WITHIN .005 TIR
 8. BREAK EDGES PER FIG. 3, ROUNDNESS $\sqrt{.32}$
 9. BREAK EDGES PER FIG. 3, ROUNDNESS $\sqrt{.32}$
 10. BREAK EDGES PER FIG. 3, ROUNDNESS $\sqrt{.32}$
 11. BREAK EDGES PER FIG. 3, ROUNDNESS $\sqrt{.32}$
 12. BREAK EDGES PER FIG. 3, ROUNDNESS $\sqrt{.32}$

THE INFORMATION DISCLOSED HEREIN IS THE EXCLUSIVE PROPERTY OF
MBS MAGNETIC BRAKE SYSTEMS
 4725 CALLE QUETZAL, CAMARILLO, CA 93012
 OR MAY CONTAIN PROPRIETARY RIGHTS OF OTHERS AND IS NOT TO BE USED OR
 DISCLOSED TO OTHERS WITHOUT THE WRITTEN CONSENT OF THE ABOVE

BRAKE - MAGNETIC,
 MODEL MBL-2.4

SH 1 DF 1
 324-0200